


NIKKO

ALPHA II

MODEL

SERVICE MANUAL

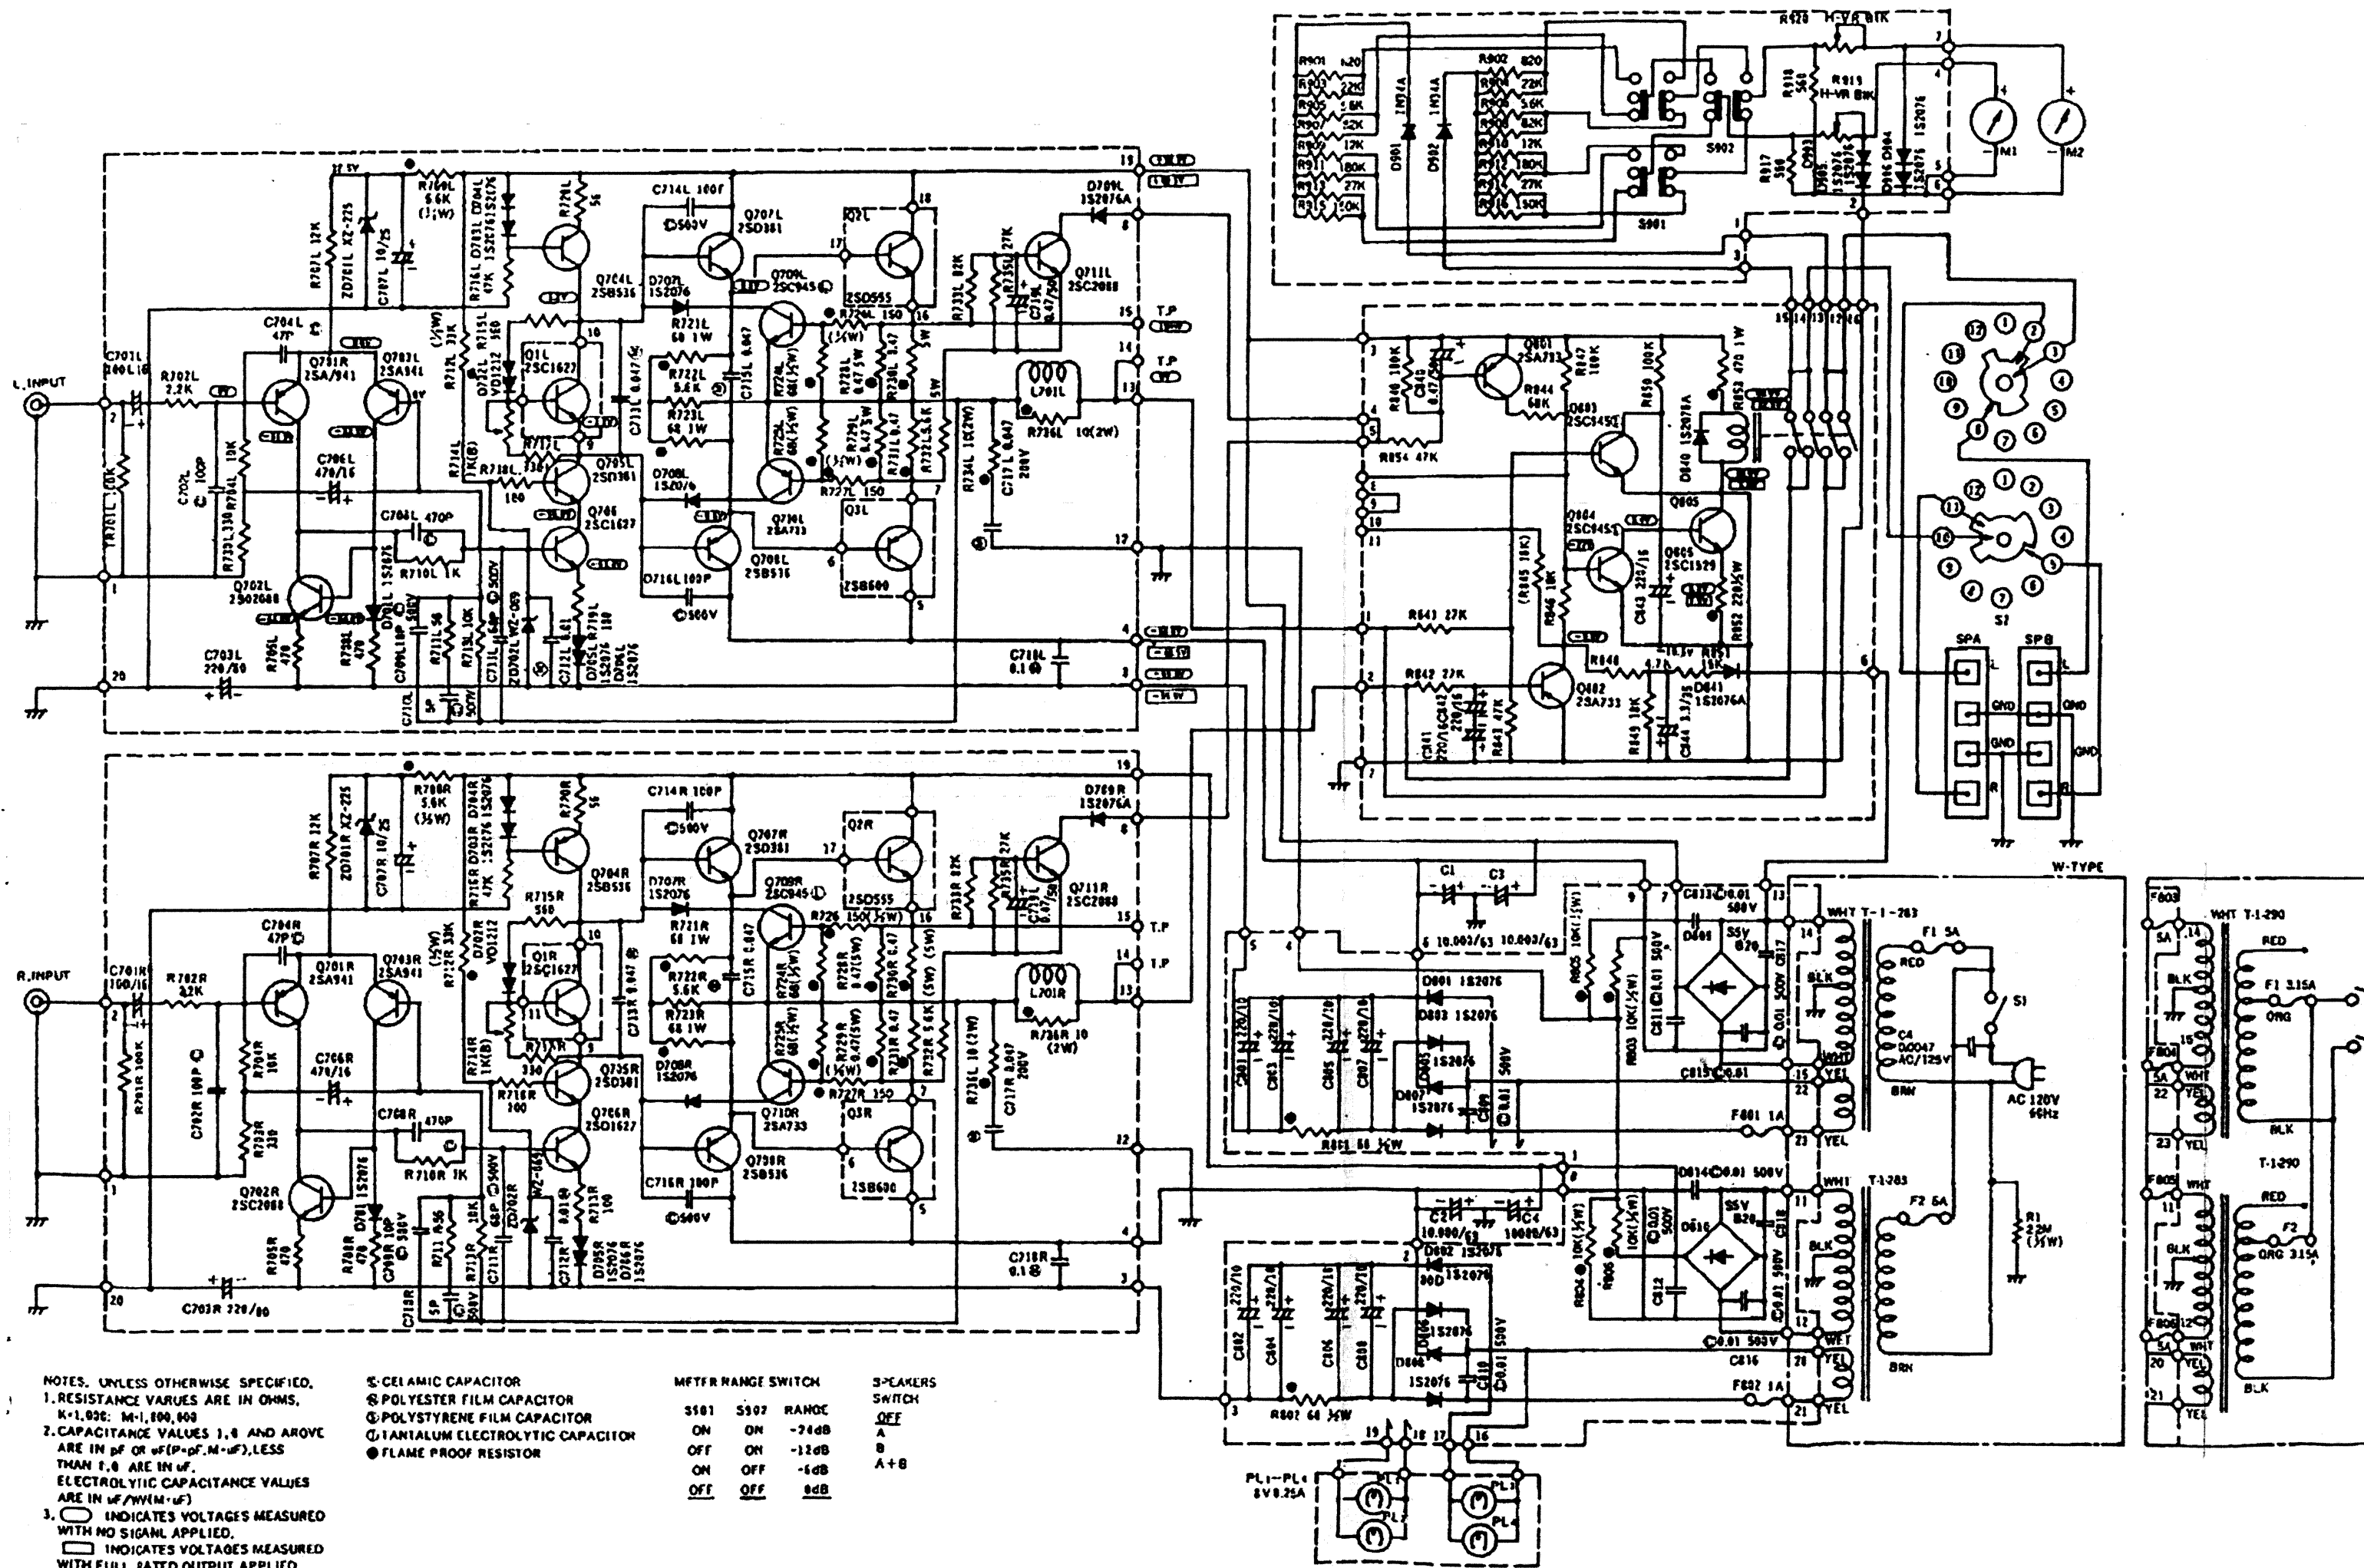

NOTES. UNLESS OTHERWISE SPECIFIED,
1. RESISTANCE VALUES ARE IN OHMS,
K=1,000; M=1,000,000
2. CAPACITANCE VALUES 1.0 AND ABOVE
ARE IN PF OR UF (P=PF, M=UF), LESS
THAN 1.0 ARE IN UF.
ELECTROLYTIC CAPACITANCE VALUES
ARE IN UF/WV(M=UF)
3. INDICATES VOLTAGES MEASURED
WITH NO SIGNAL APPLIED.
 INDICATES VOLTAGES MEASURED
WITH FULL RATED OUTPUT APPLIED.
SPECIFICATIONS AND CIRCUIT ARE SUBJECT
TO CHANGE WITHOUT NOTICE.

● CERAMIC CAPACITOR
⊗ POLYESTER FILM CAPACITOR
⊙ POLYSTYRENE FILM CAPACITOR
□ TANTALUM ELECTROLYTIC CAPACITOR
● FLAME PROOF RESISTOR

METER RANGE SWITCH		
S101	S102	RANGE
ON	ON	-24dB
OFF	ON	-12dB
ON	OFF	-6dB
OFF	OFF	0dB

● SPEAKERS
SWITCH
OFF
A
A+B

